


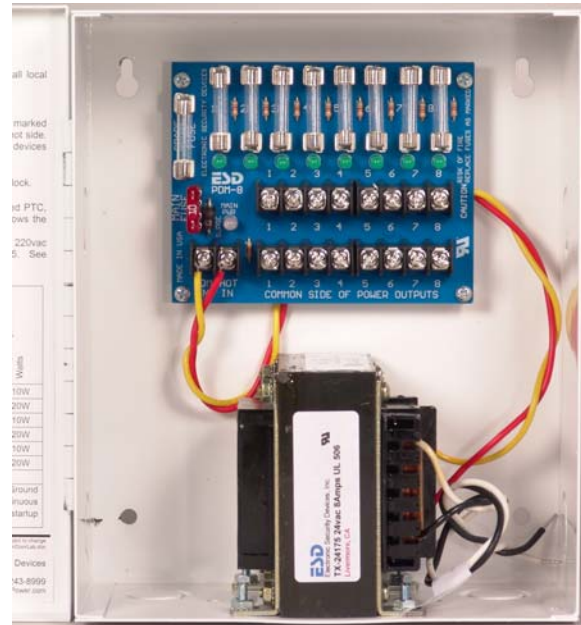
**CCTV Multi-Output Power Supplies
PDA Economy Series
Made in the USA - Life Time Warranty**

PDA Economy Series Features:

- 2, 4 & 8 Amp Configurations
- 4, 8 & 9 Output Configurations using PDM Output Modules with Fuses or Circuit Breakers
- Enclosure: 7.6" x 9" x 3.5"D
- Main Power Status LED (8 & 9 Output Models)
- Surge and Lightning Suppression (8 Output Models)
- Output Status LED's for Each Output
- Main Fuse/Power Pull with Handle
- Transformers are  506 Line Cord and Wire Nuts Provided
- RoHS Lead Free




PDA-8EST8



Description

The (ES) small enclosure CCTV Power Supplies provide an economical source of centralized 24vac for installations that require 4 to 8 Amps with 4 to 9 outputs. For more power or outputs see our standard or large PDA series. These central outputs can power multiple fixed cameras or pan-tilt cameras with heaters. The table below is a list of standard (ES) configurations with default fuse values. If you wish to use auto resetting circuit breakers, just add a "C" at the end of the part number and we will substitute the equivalent PTC for the fuses. Each PDM-8 output power distribution module has a 1500-watt surge protector to help save your cameras from lightning and power surges. The small enclosure has seven (7) combination 1/2" and 3/4" knockouts for ease of installation. The table below list some default values for fuses and circuit breakers, any of our standard values may be substituted upon request.

|  Economy Series Specification and Selection Table | Protected Outputs | Total Output Amps | Output Fuses agc /Circuit Breakers | Output Status LED's | Main Fuse ATO/ Main with PTC's | Main Power LED's | Spike and Noise Suppression | Power Required Watts |
|---|-------------------|-------------------|------------------------------------|---------------------|--|------------------|-----------------------------|----------------------|
| PDA-4EST2 | 4 | 2A | 500ma | Yes | Switch | No | No | 110W |
| PDA-4EST4 | 4 | 4A | 2A/1.4A | Yes | Switch | No | No | 110W |
| PDA-4EST8 | 4 | 8A | 4A/3A | Yes | Switch | No | No | 220W |
| PDA-8EST4 | 8 | 4A | 2A/3A | Yes | 5A/40A | Yes | Yes | 110W |
| PDA-8EST8 | 8 | 8A | 2A/3A | Yes | 10A/40A | Yes | Yes | 220W |
| PDA-9EST4 | 9 | 4A | 2A/1.4A | Yes | 5A/20A | Yes | No | 110W |
| PDA-9EST8 | 9 | 8A | 2A/3A | Yes | 10A/40A | Yes | No | 220W |
| Input: 115vac – 230vac available on request Add "C" to part number for PTC auto-resetting fuses Line Cord with wire nuts are provided | | | | | All Outputs are isolated from Primary & Ground Current ratings are continuous 150% brief overloads are allowed for startup | | | |

05/10/10 © Technical Literature jdb specifications subject to change
\\products\pd8\PDAEconTechSales.doc



Electronic Security Devices
2200 N MacArthur Drive
Tracy, CA 95376

Manufacturers of High Quality Security Devices

Phone: (209) 229-7140 Fax: (209) 229-7145
ESD@SecurityPower.com www.SecurityPower.com