
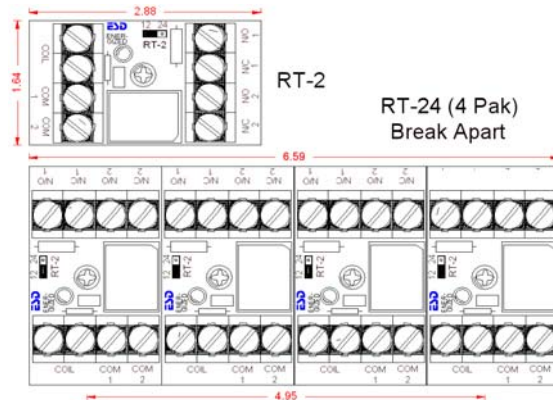


**RT-2 DPDT RELAY
RT-24 (4 break apart)
Made in the USA - Lifetime Warranty**

Features:

- Heavy-Duty 5 Amp Contacts
- Selectable 12 / 24 VDC
- Sensitive Coil
- Coil Spike Protector Built-In
- BI-Color LED Shows Relay Energized with Either Polarity
- Heavy Duty Terminal Blocks with Self Clamping Screws.
- Mounting Holes
- Pre Mounted Double Side Tape
- RT-24 is Break Apart 4-Pak
- RoHS Lead Free

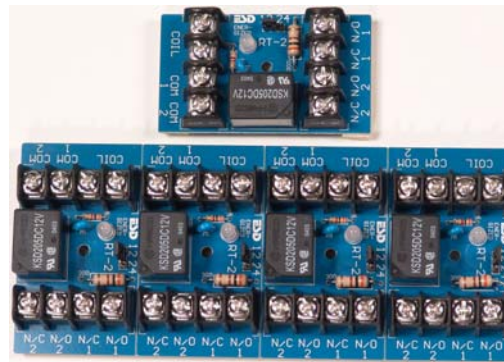

DESCRIPTION

The RT-2 is a Sensitive Double Pole Double Throw relay with heavy-duty 5 Amp contacts. The Coil requires only 40mA to energize two sets of 5 Amp contacts. The RT-2's Coil has a MOV across it to protect your sensitive electronics from the spike that is generated from most other relays. The RT-2 has a BI colored LED across the coil that lights when energized, regardless of polarity. This makes installation easier. No spade lugs are required with our self-clamping screw terminals.

TERMINALS and OPERATION

Coil Terminals (Coil) Input Power to energize relay. May be 12VDC or 24VDC, Polarity does not matter. Select voltage before applying power. Move jumper to the left 2 pins for 12VDC. Move to the right 2 pins for 24VDC.

LED ON indicates the relay is energized. When the LED is OFF the relay is de-energized.

The LED has 2 green LED's back to back so the color will be green with either polarity.

COM 1 & COM 2 Terminals are the common or swing arm connection to the contact sets 1 and 2.

N/C 1 & N/C 2 Terminals are the relay's normally closed contacts. COM and N/C are Normally Closed; they open when relay is energized.

N/O 1 & N/O 2 Terminals are the relay's Normally Open contacts. COM and N/O are Normally Open; they close when relay is energized.

SPECIFICATIONS

- Coil Current @ 12 or 24VDC 40ma
- Coil Resistance +-10% 300 Ohms
- Contact Ratings 5 Amps @ 120vac Resistive
- Terminal Blocks self clamping . multi 12-30awg
- Minimum Continuous Duty Current..... 100ma
- Size: See Drawing Above
- Service Life 10 million operations



Electronic Security Devices
2200 N MacArthur Drive
Tracy, CA 95376

Manufacturers of High Quality Security Devices

Phone: (209) 229-7140 Fax: (209) 229-7145
ESD@SecurityPower.com www.SecurityPower.com

12/3/09 © Technical Literature jdb RT-2 specifications subject to change
products\RT-2TechSales